

LOCKER

A mobile fall arrest device designed primarily for rope access. When attached to a rope, LOCKER tracks the worker's upward and downward movement without the worker having to operate it. In the case of a fall, it automatically locks onto the rope and stops the fall. LOCKER is a guardian angel for work at heights.

DESCRIPTION

Designed for ropes with a diameter of 11 mm.

LOCKER is certified according to EN 12841-A and as part of the EN 353-2 system.

For connection to the harness, a connector (EN 362) or the LOCKER LINK fall absorber can be used.

LOCKER is equipped with a locking cam to fix the device in the desired position.

For work positioning, a non-detachable version with a rope with a stitched eye is designed – the SITE positioning device.



When used without the fall absorber, it is intended for users weighing up to 100 kg.

Accessory LOCKER LINK fall absorber reduces the impact force in the case of a fall, allowing a user weight of up to 150 kg (including equipment) and use on inclined or horizontal surfaces, including possible falls over edges.

Unique product number for better record keeping and periodic inspection.

KEY FEATURES

- user weight 30-100 kg, with LOCKER LINK fall absorber up to 150 kg
- for 11 mm ropes

STANDARDS

CE 1019

EN 353-2
EN 12841-A

FEATURES



Ø 11 mm
EN 1891



1 person
only



188 g / 6.63 oz



unique
number




warranty

MATERIALS



- 95 % light alloy
- 5 % stainless steel

TECHNICAL DATA

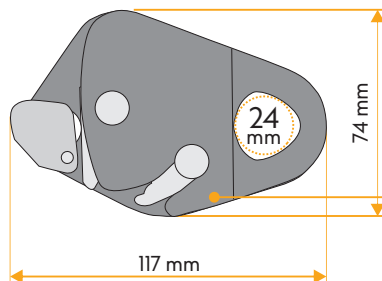

Unique number marking
□XXXXW1010MMYY

- = datamatrix
- XXXX = unique number
- W1010 = product code
- MMYY = month and year of production

